


JW-HD120N

N-type Bifacial High Efficiency Mono Silicon Half-Cell Double Glass Module

325-350W

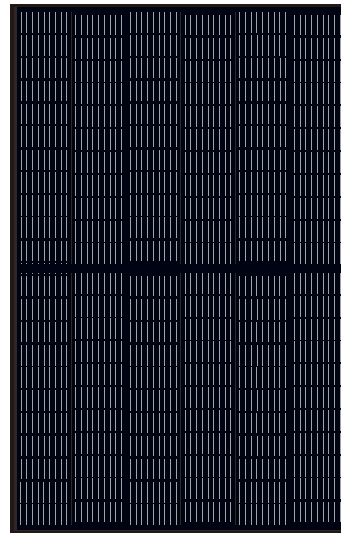

- * , ' N
Maximum Power Output
-) ' %OfI
Maximum Module Efficiency
- ' u" , N
Power Output Guarantee



High Power Output
MBB technology reduces the distance between busbars and finger grid lines, improving reliability and increasing output



Better Weak Illumination Response
Wide spectral response, higher power output even under low-light settings like smog or cloudy days.



ZERO LID (Light Induced Degradation)
N-type solar cell has no LID naturally, can increase power generation



Better Temperature Coefficient
Higher power generation under working conditions, thanks to passivating contact cell technology



Lower LCOE
High power and 1500V system voltage, saving BOS cost




Outstanding visual appearance
Designed with aesthetics in mind, thinner wires that appear all black at a distance

Additional Insurance Backed by Munich Re

- Leader of n-type bifacial technology
- Fully automatic facility and world-class technology
- Long term reliability tests
- 100% EL inspection ensuring defect-free modules

Linear Performance Warranty

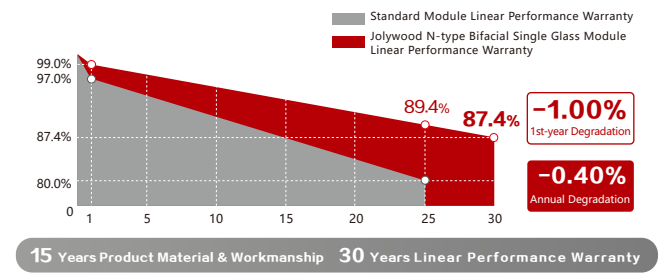

Additional Insurance Backed by Munich Re



JW-HD120N Series

N-type Bifacial High Efficiency Mono Silicon Half-Cell Double Glass Module

Electrical Properties | STC*

Testing Condition	Front Side	Front Side	Front Side	Front Side	Front Side	Front Side
Peak Power (Pmax) (W)	325	330	335	340	345	350
MPP Voltage (Vmp) (V)	34.1	34.4	34.7	35.1	35.4	35.7
MPP Current (Imp) (A)	9.54	9.60	9.66	9.70	9.75	9.81
Open Circuit Voltage (Voc) (V)	41.0	41.2	41.5	41.8	42.1	42.4
Short Circuit Current (Isc) (A)	10.01	10.07	10.12	10.17	10.22	10.28
Module Efficiency (%)	19.31	19.61	19.90	20.20	20.50	20.79

*STC: Irradiance 1000 W/m², Cell Temperature 25°C, AM1.5
The data above is for reference only and the actual data is in accordance with the practical testing

Electrical Properties | NOCT*

Testing Condition	Front Side	Front Side	Front Side	Front Side	Front Side	Front Side
Peak Power (Pmax) (W)	246	250	253	257	261	265
MPP Voltage (Vmp) (V)	32.0	32.3	32.5	32.9	33.2	33.5
MPP Current (Imp) (A)	7.69	7.74	7.79	7.82	7.86	7.91
Open Circuit Voltage (Voc) (V)	39.2	39.4	39.7	40.0	40.2	40.5
Short Circuit Current (Isc) (A)	8.07	8.12	8.16	8.20	8.24	8.29

*NOCT: Irradiance at 800 W/m², Ambient Temperature 20°C, Wind Speed 1 m/s

Operating Properties

Operating Temperature (°C)	-40°C~+85°C
Maximum System Voltage (V)	1500V (IEC)
Maximum Series Fuse Rating(A)	20
Power Tolerance	0~+5W
Bifaciality*	80%

*Bifaciality= $\frac{P_{maxrear}(STC)}{P_{maxfront}(STC)}$, Bifaciality tolerance:±5%

Temperature Coefficient

Temperature Coefficient of Pmax*	-0.320%/°C
Temperature Coefficient of Voc	-0.260%/°C
Temperature Coefficient of Isc	+0.046%/°C
Nominal Operating Cell Temperature (NOCT)	42±2°C

*Temperature Coefficient of Pmax±0.03%/°C

Mechanical Properties


Cell Type	158.75mm*79.375mm
Number of Cells	120pcs(12*10)
Dimension	1690mm*996mm*30mm
Weight	21.5kg
Front /Rear Glass*	2.0mm/2.0mm
Frame	Anodized Aluminium
Junction Box	IP68 (3 diodes)
Length of Cable*	4.0mm ² , 300mm Or 1200mm
Connector	MC4 Compatible Or MC4 Original Connector

*Heat strengthened glass
*Cable length can be customized




With Different Power Generation Gain (regarding 340W as an example)

Power Gain (%)	Peak Power (Pmax) (W)	MPP Voltage (Vmp) (V)	MPP Current (Imp) (A)	Open Circuit Voltage (Voc) (V)	Short Circuit Current (Isc) (A)
10	367	35.1	10.46	41.8	10.96
15	381	35.1	10.83	41.8	11.36
20	394	35.2	11.21	41.9	11.76
25	408	35.2	11.59	41.9	12.15
30	422	35.2	11.97	41.9	12.55

Engineering Drawing (unit: mm)

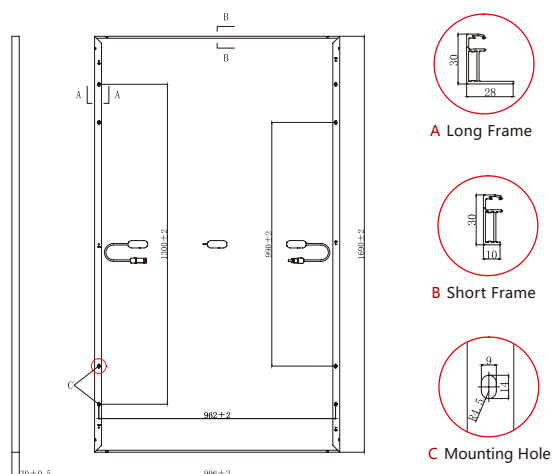

Characteristic Curves | HD120N-340

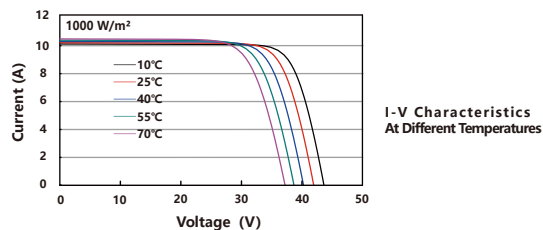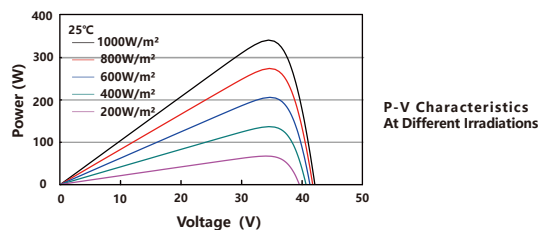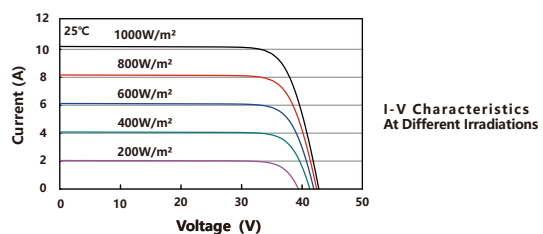

Packaging Configuration

Packing Type	20'GP	40'GP	40'HQ
Piece/Pallet		35	
Pallet/Container	6	13	26
Piece/Container	210	455	910

*The specification and key features described in this datasheet may deviate slightly and are not guaranteed. Due to ongoing innovation, R&D enhancement, Jolywood (Taizhou) Solar Technology Co., Ltd. reserves the right to make any adjustment to the information described herein at any time without notice. Please always obtain the most recent version of the datasheet which shall be duly incorporated into the binding contract made by the parties governing all transactions related to the purchase and sale of the products described herein.

www.jolywood.cn