Shinetech New Energy GmbH

Argelsrieder Feld 1a, 82234 Weßling Tel: 08153 40 04 701 info@shinetech-power.de

SHINEMANN


BP Series

High Frequency OFF-Grid Solar Inverter

MAIN FEATURES:


- Rated power 5KW, power factor 1
- Built-in MPPT, MPPT voltage range 120V ~ 430Vdc
- Pure sine wave AC output
- Solar and utility joint to power the loads
- With the ability to work with or without battery
- Parallel operation up to 6 units
- WIFI/ GPRS remote monitoring
- CAN/ RS485 communication for BMS




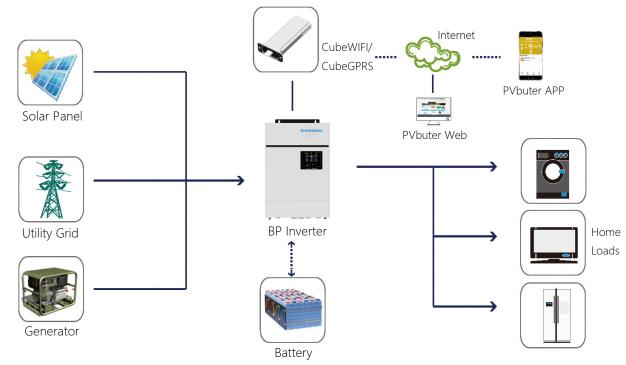

INTRODUCTION:

BP series off grid solar inverter is integrated with a MPPT solar charge controller, a high frequency pure sine inverter and a UPS function module in one machine. This inverter can work with or without batteries. BP 5KW can be wired in parallel to increase the output capacity. With monitoring accessory, the whole system status can be monitored anytime anywhere.





BOTTOM VIEW

Shinetech New Energy GmbH

Argelsrieder Feld 1a, 82234 Weßling Tel: 08153 40 04 701

info@shinetech-power.de



High	Frequency Solar Inverter
Specification	5KW
Rated Power	5000VA/5000W
SystemDC voltage	48VDC
Parallel Option	Yes, up to 6 units
Monitoring Option	WiFi or GPRS
	Inverter Output
AC Voltage	220V-230V-240VAC
Surge Power	10000VA
Peak Efficiency	93%
Transfer Time	10ms(For Personal Computeis); 20ms(For Home Appliances)
Waveform	Pure Sine Wave
Sola	ar Charger & AC Charger
Max. PV Array Open Circuit Voltage	450Vdc
Max. PV Array Power	6000W
Operating Voltage MPPT Range	120-430Vdc, Starting Voltage 150Vdc
Battery Overcharge Protection	60Vdc
Max. Solar Charge Current	100A
Max. AC Charge Current	80A
Max. Charge Current	100A
	Physical
Dimension	470x320x135mm
Net Weight	12Kg
Communication Interface	USB/CAN/RS485
	Environment
Humidity	5% to 95% Relative Humidity(Non-condensing)
Operating Temperature	0°C-50°C
Storage	-15°C-60°C

